

**ML23CK3\_1 195 Ah**

According to EN 50342



**AGM series**

HEAVY-DUTY VEHICLES



**Electrical specification**

<b>Voltage:</b>	<b>12V</b>
<b>Capacity:</b>	<b>195 Ah</b>
<b>Cold cranking current:</b>	<b>1200 A [EN]</b>
<b>Cold cranking current:</b>	<b>720 A [DIN]</b>

**Mechanical specification**

<b>Dimensional group:</b>	<b>C</b>
<b>ETN reference:</b>	<b>695 901 120</b>
<b>DIN reference:</b>	<b>69501</b>
<b>Dimensions (LxWxH):</b>	<b>514x274x242</b>
<b>Cell Layout:</b>	<b>3</b>
<b>Terminal Type:</b>	<b>1</b>

**Container**

<b>Case</b>	<b>Material</b>	<b>Polypropylene</b>
	<b>Bottom hold-down</b>	<b>B0</b>
	<b>Colour</b>	<b>Grey</b>

<b>Lid</b>	<b>Material</b>	<b>Polypropylene</b>
	<b>Cover design</b>	<b>Kamina</b>
	<b>Colour</b>	<b>Black</b>

<b>Vent caps</b>	<b>Material</b>	<b>Polypropylene</b>
	<b>Type</b>	<b>Kamina</b>
	<b>Colour</b>	<b>Black</b>

<b>Handles</b>	<b>Material</b>	<b>Polypropylene</b>
	<b>Position</b>	<b>Sides - on container</b>
	<b>Colour</b>	<b>Black</b>


**Battery classification as per EN 50342-6**

<b>Water consumption</b>	<b>Charge retention</b>	<b>Vibration resistance</b>	<b>Endurance Level</b>
<b>W4</b>	<b>C2</b>	<b>V3</b>	<b>E3</b>

**Weight**

<b>Battery weight:</b>	<b>42.00</b>
<b>Acid weight:</b>	<b>14.20</b>
<b>Total battery weight:</b>	<b>56.20</b>

**Layout**

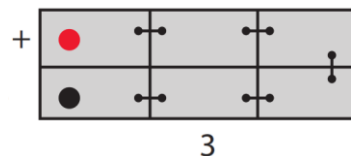

**Hold-down**



**Separator**

<b>Type</b>	<b>AGM</b>
-------------	------------