

MONBAT Premium SMF A56L1X0_1 56 Ah

According to EN 50342



Premium

SEALED MAINTENANCE FREE



Electrical specification

Voltage:	12V
Capacity:	56 Ah
Cold cranking current:	560 A [EN]
Cold cranking current:	340 A [DIN]

Mechanical specification

Dimensional group:	L1
ETN reference:	556 113 056 SMF
DIN reference:	-
Dimensions (LxWxH):	207x175x190
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B13
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V2	E2


Weight

Battery weight:	9.70
Acid weight:	3.80
Total battery weight:	13.50

Layout

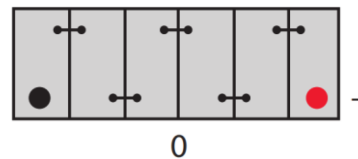

Hold-down



Separator

Type	PE
-------------	-----------