

N66L2X0_1 60 Ah

According to EN 50342



**EFB
Start Stop**

SEALED MAINTENANCE FREE



Electrical specification

Voltage:	12V
Capacity:	60 Ah
Cold cranking current:	560 A [EN]
Cold cranking current:	340 A [DIN]

Mechanical specification

Dimensional group:	L2
ETN reference:	560 002 056
DIN reference:	56002
Dimensions (LxWxH):	242x175x190
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B13
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	GREY

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	GREY


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level	Micro-cycle performance
W4	C2	V2	E2	M1


Weight

Battery weight:	11.60
Acid weight:	5.00
Total battery weight:	16.60

Layout

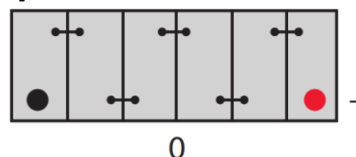

Hold-down



Separator

Type	PE
-------------	-----------