

Range: **CYCLIC AGM**
 Type name: **TBC12-36**
 Barcode: **8436594880490**



| PERFORMANCES* | | CONFIGURATION | |
|--|--------------|---------------|------------------------|
| Voltage: | 12 V | Size: | 195x130x164 mm (U1) |
| Capacity: | 36 Ah (20h) | Polarity: | 1 |
| Cap. 5/10/100h: | 29/33/37 Ah | Terminal: | M (M5 thread) |
| Energy at 100h: | 0,45 kWh | Holddown: | - |
| Cycles at 50%: | 700 | Ventilation: | Valve regulated (VRLA) |
| Max. current: | 495 A (5seg) | Maintenance: | Not required (MF) |
| Int. Resistance: | 11 mΩ | | |
| Self-Discharge: | 15 months | | |
| (from the date of production, at 25°C) | | | |

*According to standards IEC 60254/60896

| INTERNAL CONSTRUCTION | | COMPONENTS | |
|-----------------------|-------------------------|------------|---------------------------|
| Technology: | Manufacturer-sealed AGM | Container: | ABS/black |
| Alloy: | Calcium | Lid: | ABS/black |
| Separator: | AGM (glass mat) | Plugs: | Termal sealing, ABS/black |
| Total Weight: | 12 kg | Handles: | On lid, PP/black |
| Origin: | Asia | | |

| RECOMMENDATIONS | |
|-----------------|---|
| Storage: | Check voltage every 8 months. |
| Recharge: | Use automatic chargers with constant voltage and AGM setup. |
| Installation: | Use the appropriate cable section and length. Keep connections tight. |

CEMA Baterías is the exclusive importer for Europe of DECK Battery products

TABLES & CHARTS

CYCLIC AGM

TBC12-36


TBC12-36 Constant Current Discharge (Amperes) at 25 °C

| F.V/Time | 10min | 15min | 20min | 30min | 45min | 1h | 2h | 3h | 4h | 5h | 6h | 8h | 10h | 20h |
|------------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|
| 1.85V/cell | 48.3 | 40.7 | 35.5 | 25.6 | 20.3 | 16.5 | 10.2 | 7.98 | 6.46 | 5.25 | 4.58 | 3.74 | 3.12 | 1.75 |
| 1.80V/cell | 61.7 | 49.1 | 42.0 | 30.2 | 23.6 | 18.5 | 11.2 | 8.59 | 6.90 | 5.64 | 4.91 | 3.97 | 3.30 | 1.77 |
| 1.75V/cell | 67.8 | 53.7 | 45.2 | 31.3 | 24.5 | 19.3 | 11.6 | 8.75 | 7.06 | 5.79 | 5.05 | 4.04 | 3.33 | 1.79 |
| 1.70V/cell | 73.9 | 57.3 | 47.5 | 32.6 | 25.5 | 19.9 | 12.0 | 8.99 | 7.24 | 5.93 | 5.15 | 4.09 | 3.37 | 1.82 |
| 1.65V/cell | 79.8 | 60.9 | 50.4 | 34.4 | 26.1 | 20.6 | 12.4 | 9.37 | 7.49 | 6.10 | 5.27 | 4.16 | 3.44 | 1.84 |
| 1.60V/cell | 86.6 | 65.1 | 53.7 | 36.3 | 27.2 | 21.3 | 12.8 | 9.66 | 7.73 | 6.30 | 5.38 | 4.20 | 3.47 | 1.85 |


TBC12-36 Constant Power Discharge (Watts/cell) at 25 °C

| F.V/Time | 10min | 15min | 20min | 30min | 45min | 1h | 2h | 3h | 4h | 5h | 6h | 8h | 10h | 20h |
|------------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|
| 1.85V/cell | 90.1 | 76.6 | 67.7 | 49.1 | 39.3 | 32.0 | 19.9 | 15.6 | 12.7 | 10.3 | 9.05 | 7.40 | 6.17 | 3.51 |
| 1.80V/cell | 113.6 | 91.2 | 78.8 | 57.3 | 45.3 | 35.6 | 21.6 | 16.7 | 13.4 | 11.0 | 9.67 | 7.84 | 6.53 | 3.53 |
| 1.75V/cell | 123.3 | 98.7 | 84.1 | 59.2 | 46.8 | 37.1 | 22.4 | 17.0 | 13.7 | 11.3 | 9.92 | 7.96 | 6.59 | 3.56 |
| 1.70V/cell | 132.6 | 104.6 | 87.9 | 61.3 | 48.5 | 38.2 | 23.2 | 17.4 | 14.1 | 11.6 | 10.1 | 8.07 | 6.65 | 3.63 |
| 1.65V/cell | 142.0 | 110.5 | 92.9 | 64.4 | 49.6 | 39.3 | 23.8 | 18.1 | 14.5 | 11.9 | 10.3 | 8.19 | 6.78 | 3.67 |
| 1.60V/cell | 151.6 | 116.8 | 97.9 | 67.3 | 51.2 | 40.4 | 24.4 | 18.5 | 14.9 | 12.2 | 10.5 | 8.26 | 6.85 | 3.68 |


Discharge Characteristics

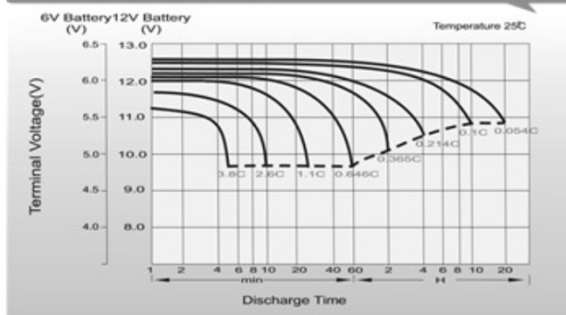


Charging Characteristics (cycle use)

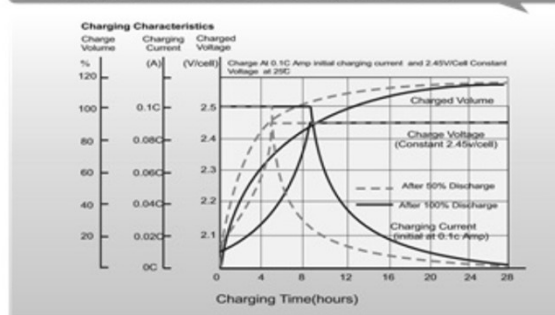


Temperature Effects in Relation to Battery Capacity

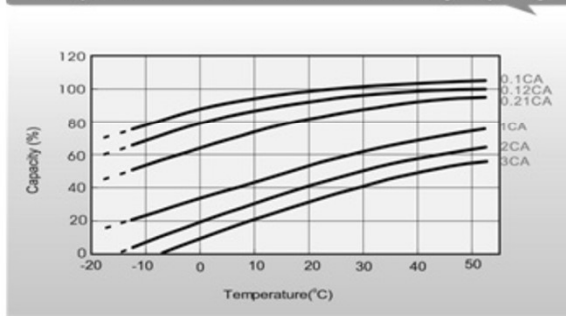

Cycle Life in Relation to Depth of Discharge

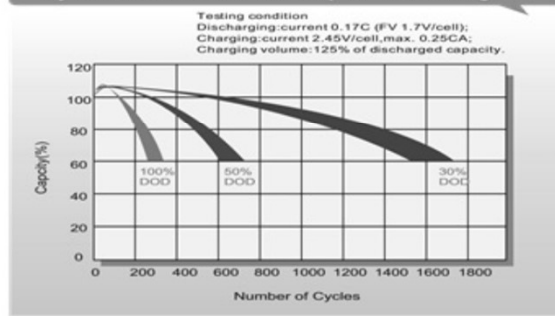

Self Discharge Characteristics

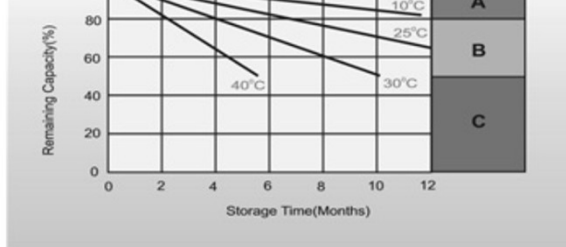

Self Discharge Characteristics

- A** No supplementary charge required
(Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
 1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
 2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
 3. Charged for 8-10 hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity.
The battery should never be left standing till this is reached.