


Range: **MOTO AGM DRY**

Type name: **YTX5L-BS**

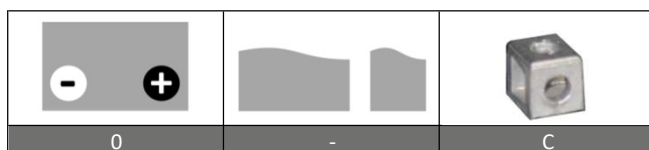

| PERFORMANCES* | | CONFIGURATION | |
|-------------------|----------------|---------------|------------------------|
| Voltage: | 12 V | Size: | 113x70x105 mm (Moto) |
| Capacity: | 4 Ah (10h) | Polarity: | 0 |
| C. Cranking (EN): | 70 A | Terminal: | C (squared) |
| Vibration (EN): | Not applicable | Holddown: | - |
| Duration (EN): | Not applicable | Ventilation: | Vent with valve (VRLA) |
| Self-Discharge: | Not applicable | Maintenance: | Not required (MF) |

*According to standard EN 50342

| INTERNAL CONSTRUCTION | | COMPONENTS | |
|-----------------------|----------------------|-----------------|--------------------|
| Tecnology: | Dry charged AGM | Box/Recipiente: | PP/black |
| Alloy: | Calcium | Lid: | PP/black |
| Separator: | AGM (glass mat) | Plugs: | Pressure, PP/black |
| Total Weight: | 1,52 kg | Handles: | - |
| Acid: | Side-bottle included | | |
| Origin: | Asia | | |

| RECOMMENDATIONS | |
|-----------------|------------------------------------------------------|
| Storage: | Ensure proper stock rotation. Avoid moisture. |
| Recharge: | Not required, but convenient after first activation. |
| Installation: | Never install in tilted or horizontal position. |