


Range: **MOTO AGM WET**  
 Type name: **YTZ10S**

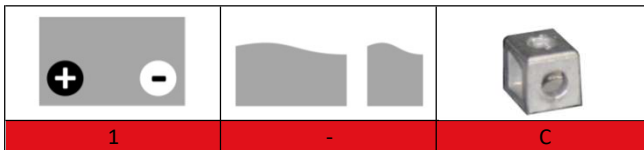

PERFORMANCES*		CONFIGURATION	
Voltage:	12 V	Size:	150x88x93 mm (Moto)
Capacity:	8,6 Ah (10h)	Polarity:	1
C. Cranking (EN):	190 A	Terminal:	C (squared)
Vibration (EN):	Not applicable	Holddown:	-
Duration (EN):	Not applicable	Ventilation:	Valve regulated (VRLA)
Self-Discharge:	15 months	Maintenance:	Not required (MF)
(from the date of production, at 25°C)			

\*According to standard EN 50342

INTERNAL CONSTRUCTION		COMPONENTS	
Tecnology:	Manufacturer-sealed AGM	Box/Recipiente:	PP/black
Alloy:	Calcium	Lid:	PP/black
Separator:	AGM (glass mat)	Plugs:	Pressure, PP/black
Total Weight:	3,18 kg	Handles:	-
Acid:	Inside the battery		
Origin:	Asia		

RECOMMENDATIONS	
Storage:	Check voltage every 6 months. Avoid exposure to sub-zero temperatures.
Recharge:	Use automatic chargers with constant voltage and AGM setup.
Installation:	Suitable for tilted or horizontal position.