


Range: **MOTO CONVENTIONAL**
 Type name: **YB16AL-A2**

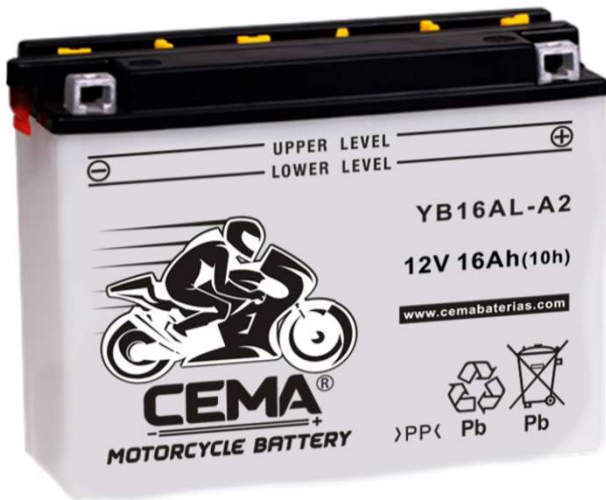

PERFORMANCES*		CONFIGURATION	
Voltage:	12 V	Size:	207x71,5x164 mm (Moto)
Capacity:	16 Ah (10h)	Polarity:	0A
C. Cranking (EN):	175 A	Terminal:	C (squared)
Vibration (EN):	Not applicable	Holddown:	-
Duration (EN):	Not applicable	Ventilation:	Individual plugs
Self-Discharge:	Not applicable	Maintenance:	Low maintenance

*According to standard EN 50342

INTERNAL CONSTRUCTION		COMPONENTS	
Tecnology:	Casted flat plate	Box/Recipiente:	PP/white
Alloy:	Antimony	Lid:	PP/black
Separator:	PE	Plugs:	Pressure, PP/red
Total Weight:	4,1 kg	Handles:	-
Acid:	Side-bottle included		
Origin:	Asia		

RECOMMENDATIONS	
Storage:	Ensure proper stock rotation. Avoid moisture.
Recharge:	Not required, but convenient after first activation.
Installation:	Arrange gas outlet accessories (plug & pipe).