


Range: **DYNAMIC**
 Type name: **CB110-L6**
 Barcode: **8436594881077**

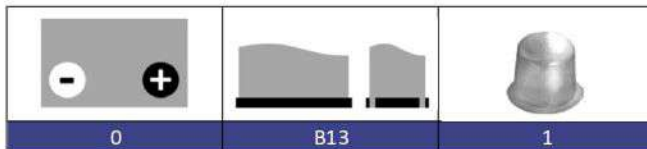

PERFORMANCES*		CONFIGURATION	
Voltage:	12 V	Size:	394x175x190 mm (L6)
Capacity:	110 Ah (20h)	Polarity:	0
C. Cranking (EN):	1000 A	Terminal:	1 (taper)
Vibration (EN):	V1	Holddown:	B13
Duration (EN):	E1	Ventilation:	Central
Self-Discharge:	12 months <small>(from the date of production, at 25°C)</small>	Maintenance:	Not required (MF)

*According to standard EN 50342

INTERNAL CONSTRUCTION		COMPONENTS	
Tecnology:	Expanded	Box/Recipiente:	PP/black
Alloy:	Calcium	Lid:	Kamina, PP/black
Separator:	PE envelope	Plugs:	Screw, PP/black
Total Weight:	25,7 kg	Handles:	On lid, PP/black
Acid:	Inside the battery		
Origin:	Europe		

RECOMMENDATIONS	
Storage:	Check voltage every 6 months. Avoid exposure to sub-zero temperatures.
Recharge:	Use automatic chargers with constant voltage.
Installation:	Not applicable to Start-Stop vehicles.