


Range: ASIA
Type name: TEX9500
Barcode: 8436594880094

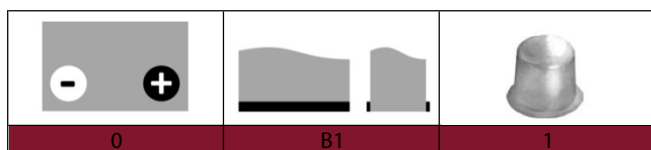

| PERFORMANCES* | | CONFIGURATION | |
|--|--------------|---------------|----------------------|
| Voltage: | 12 V | Size: | 306x175x224 mm (D31) |
| Capacity: | 100 Ah (20h) | Polarity: | 0 |
| C. Cranking (EN): | 750 A | Terminal: | 1 (taper) |
| Vibration (EN): | V1 | Holddown: | B1 |
| Duration (EN): | E2 | Ventilation | Central |
| Self-Discharge: | 12 months | Maintenance: | Not required (MF) |
| (from the date of production, at 25°C) | | | |

*According to standard EN 50342

| INTERNAL CONSTRUCTION | | COMPONENTS | |
|-----------------------|--------------------|-----------------|--------------------------|
| Tecnology: | Expanded | Box/Recipiente: | PP/black |
| Alloy: | Calcium | Lid: | Flat double, PP/black |
| Separator: | PE envelope | Plugs: | Termal sealing, PP/black |
| Total Weight: | 21,4 kg | Handles: | On lid, PP/black |
| Acid: | Inside the battery | | |
| Origin: | Europe | | |

| RECOMMENDATIONS | |
|-----------------|--|
| Storage: | Check voltage every 6 months. Avoid exposure to sub-zero temperatures. |
| Recharge: | Use automatic chargers with constant voltage. |
| Installation: | Not applicable to Start-Stop vehicles. |